

CL Challenger Lifts



Model#: 40EFX

Surface Mounted 4-Post Lift
12,000 lb. lifting capacity

40series 4-Post Lifts

Expand your service offering and increase your revenue potential with Challenger Lifts' 12,000 lb. four-post lifts.

Our 40series is loaded with features you would expect to pay more for, like solid piece column construction, automatic wheel stops, wheel curbs and anti-skid coating on runways to minimize slipping, etc.

With optional rolling jacks, bolt-on alignment kit, oil drain pan, etc., you'll be able to accommodate just about anything that comes in for service.

	Narrow Bay	Standard Length	Extended Length	XL Extended Length	Open Front Extended	Open Front XL Extended
Model Number	40NFX	40SFX	40EFX	40XFX	40EFO	40XFO
Lifting Capacity	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)	12,000 lb. (5443kg)
Max. Wheelbase*	157 1/2" (4001mm)	157 1/2" (4001mm)	182 1/2" (4636mm)	210" (5334mm)	182 1/2" (4636mm)	210" (5334mm)
Rise Height	79" (2007mm)				79" (2007mm)	
Length Overall	18' 3" (5563mm)	18' 3" (5563mm)	20' 4" (6198mm)	22' 7 1/2" (6896mm)	20' 8 1/2" (6312mm)	23' (7010mm)
Width Overall	10' 1" (3073mm)	10' 11" (3327mm)			11' 10" (3607mm)	
Inside Columns	106" (2692mm)	116" (2946mm)			120" front - 116" rear (3048mm front - 2946mm rear)	
Height of Columns	90 1/2" (2299mm)				99 1/2" front - 90 1/2" rear (2527mm front - 2299mm rear)	
Width of Runways	20" (508mm)				20" (508mm)	
Height of Runways	7" (178mm)				7" (178mm)	
Width Between Runways (Minimum / Maximum)	40" / 43" (1016mm / 1092mm)				43" (1092mm)	
Air Supply Required	85-115 psi				85-115 psi	
Motor	2HP				2HP	
Voltage (1 Phase Std.)**	208v-230v				208v-230v	
Speed of Rise	70 Sec.				70 Sec.	

Features & Benefits:

- 79" rise height — The highest rise in the industry
- Durable non-skid surfaces for positive vehicle traction and technician safety
- Fully gusseted base plate reduces column deflection and is less sensitive to uneven floors
- Oversized solid machined steel pulleys for prolonged pulley and cable life


For more information, contact your Authorized Challenger Lifts Distributor.

* Maximum wheelbase is based on a tire diameter of 30".
 ** Optional 3 phase electrical also available.
 Standard lift colors are Red and Blue.


optional accessories:



Part#: 10310



Part#: 10267

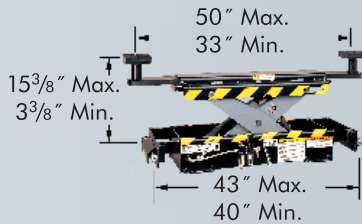

Part#: 24006C

Part Number	Description
10310	Air/electric workstation with filter/lubricator/regulator
10311	Air/electric workstation w/o filter/lubricator/regulator
10266	Drive through ramps
24006C	6,000 lb. rolling jack
10267	32 gal. rolling drain pan
10266L	Drive-thru Ramp Kit - 48" long
40230(X)(E)(S)	Internal air line kit
40200-3D	3D alignment compatible w/o radius gauges
40200-3DBK	3D alignment compatible w/black "powder coat" radius gauges(10500HD)
40200-3DSS	3D alignment compatible w/stainless steel radius gauges(10500SS)



The Automotive Lift Institute (ALI) certifies that the AR40 series described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCTV 1998 and are Third Party Validated by the ETL Testing Laboratory.

GSA CONTRACT # GS-07F-89500 • CAGE CODE OKD44
 SIN #'s 253-23, 253-23A, 253-38 • DUNS# 79-435-3680

PANZITTA SALES & SERVICE
 72 George Avenue
 Wilkes-Barre, PA 18705
 570-822-6720 800-822-6720
www.panzittasales.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.