

10,000
POUNDS OF POWER!

Versymmetric[®]

2-Post Lifts

Able to lift
SYMMETRICALLY and...

...**ASYMMETRICALLY**
in a single bay!

Challenger Lifts

Don't limit your service bay capabilities and revenue potential with a "symmetric only" or "asymmetric only" lift...**DEMAND BOTH!**

With 10,000 lbs. of lifting power, Challenger Lifts' New Versymmetric[®] 2-Post Lifts offer technicians the flexibility to accommodate just about any vehicle that comes in for service, symmetrically or asymmetrically. **It's 2 lifts in 1!**

Our new width adjustability feature makes this lift a "perfect fit" for your servicing needs. Features include: low profile arms, padded overhead cut-off bar, adjustable rubber pad adapters to protect undercoatings and much more.

Call us at **800-648-5438**, our national network of authorized distributors and installers will be glad to show you how to raise your service to full capacity.

We don't just stand behind our products, we stand under them![™]




www.challengerlifts.com



Shown:
Model CL10-2
10,000 lbs. lifting capacity
(symmetric lifting application)

Versymmetric® 2-Post Lifts - 10,000 lbs. Capacity

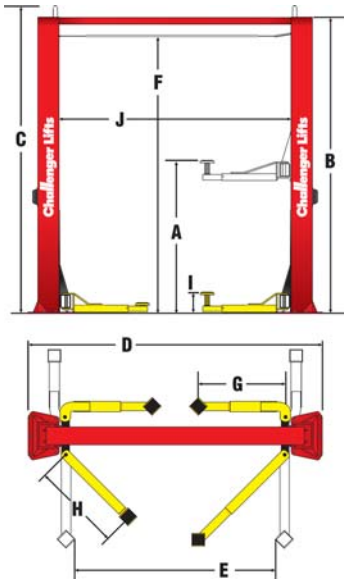

SPECIFICATIONS	Model: CL10	Model: CL10-2	Model: CL10-3
A. Rise Height*	74 5/8" (1895mm)	74 5/8" (1895mm)	74 5/8" (1895mm)
B. Column Height	11' 8" (3556mm)	13' 8" (4166mm)	14' 8" (4470mm)
C. Cylinder Overall (Full Stroke)	11' 11" (3632mm)	11' 11" (3632mm)	11' 11" (3632mm)
D. Adjustable Width Overall	11' 11" (3632mm) / 11' 6 1/2" (3518mm)		
E. Drive-Thru Clearance**	105" (2667mm) / 100 1/2" (2553mm)		
F. Floor To Overhead Switch	11' 2 1/2" (3416mm)	13' 2 1/2" (4026mm)	14' 2 1/2" (4331mm)
G. Front Arm Reach (Min./Max.)	Min. 27" (686mm) / Max. 41" (1041mm)		
H. Rear Arm Reach (Min./Max.)	Min. 42" (1067mm) / Max. 59" (1499mm)		
I. Pad Height (Adjustable Screw)	Adj. 4 1/8" - 6 5/8" (105mm-168mm)		
Pad Height (3-Position Flip-up)	3 3/4" (95mm) / 6 1/4" (159mm) / 9 3/4" (248mm)		
J. Inside Columns	114 1/2" (2908mm) / 110" (2794mm)		
Lifting Capacity	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)
Motor	2HP	2HP	2HP
Voltage (Single Phase Std.)***	208v-230v	208v-230v	208v-230v
Speed of Rise	48 Seconds	48 Seconds	48 Seconds
Ceiling Height Required	11' 11" (3632mm)	13' 9" (4191mm)	14' 9" (4496mm)
Max. Load Per Arm	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)

Power Unit Features:




Convenient single push button power unit raises lift and a release valve handle lowers it.

- ALL CL10 MODELS INCLUDE A SINGLE-POINT "MECHANICAL" LOCK RELEASE SYSTEM.
- Adjustable "rubber pad" arms standard, 3-position flip-up frame contact arms are available by adding "SP" after part number AT TIME OF ORDER (example: CL10SP, CL10-2SP, etc.).

- * Rise height is measured with screw pads in highest position.
- ** Drive-thru clearance is measured with front arms positioned forward.
- *** Optional 3 phase electrical also available, please specify at time of order.

Standard lift colors are Red (as shown) and Blue. Optional custom design colors also available, contact factory for details.

The Versymmetric® Advantage

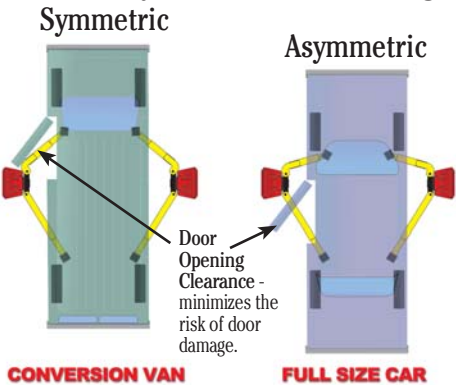

Optional Accessories:



For more information, contact your authorized Challenger Lift Distributor:

PANZITTA SALES & SERVICE
 72 George Avenue
 Wilkes-Barre, PA 18705
 570-822-6720 800-822-6720
 www.panzittasales.com



The Automotive Lift Institute (ALI) certifies that the CL10 Versymmetric 2-Post Lifts described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCTV-1998 and are Third Party Validated by the ETL Testing Laboratory.

Challenger Lifts, Inc. reserves the right to make changes without notice and without making changes retroactive. Unloading, installation and oil not included.

Attractive Lease Programs Available.
 GSA CONTRACT # GS-O7F-8950D • CAGE CODE 0KD44
 SIN#s 253-23, 253-23A, 253-38 • DUNS# 79-435-3680



Lit# CL10 7/05
 ©2005, Challenger Lifts, Inc.

Major Credit and Debit Cards Accepted

